

PreView® Has Your Blind Spot Covered

VEHICLE TYPE: CONCRETE TRUCK / CEMENT MIXER

proudly developed by



- ▶ Reduce Blind Spot Accidents
- ▶ Actively Detect Objects
- ▶ Easily Installed


Mount the rear object display on the center of the cab. Mount the Side Object Display onto the right side pillar.

One High Resolution PreView® sensor mounted on the rear of the cement truck. One PreView® Side Object Detection sensor mounted on right side.



Feed included cables to connect the appropriate display to the sensors

NIOSH BLIND SPOT CHART

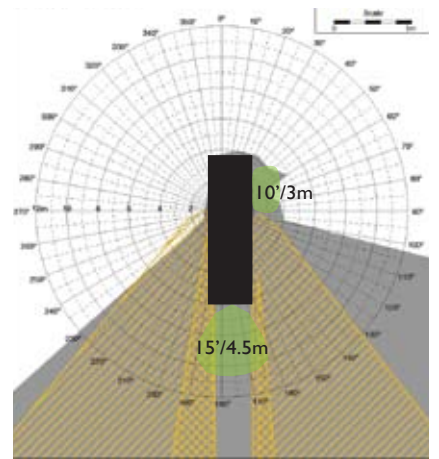

Vehicle
 Blind Spot
 PreView Coverage Area
 Convex Mirror Visibility
 Flat Mirror Visibility

Available Options: Replace in-cab LED display with PreView Plus camera and monitor system. Superimposes object detection indicators directly on to monitor and will support up to 4 cameras.



www.aps-supply.com

DIMENSIONS	SUGGESTED CONFIGURATION	SPECIFICATIONS
High Res Sensor: 4.13" (h) x 4.95" (w) x 1.7" (d)	SUGGESTED:	Op. Temps: -40° – +185°F / -40° – +85°C
SOD Sensor: 4.36" (h) x 9.25" (w) x 1.6" (d)	High Resolution PreView: 15' / 4.5m	Current Draw: < 1/2 AMP
	PreView Side Object Detetion	

To determine the best configuration to fit your specific vehicle and site conditions, please visit www.aps-supply.com or email sales.apsa@aps-supply.com to speak to a Blind Spot specialist.