

# PreView® Has Your Blind Spot Covered

VEHICLE TYPE: DIGGER DERRICK


proudly developed by



- ▶ Reduce Blind Spot Accidents
- ▶ Actively Detect Objects
- ▶ Easily Installed

One WorkZone PreView® sensor is mounted on the rear-center of the digger. This will detect objects approximately the width of the vehicle and extend 10 feet/3 meters from the sensor ( NIOSH see diagram).

The display unit provides an audible and visual warning to the operator when an object or pedestrian is in the blind spot. This gives the driver extra time to react to prevent an accident.

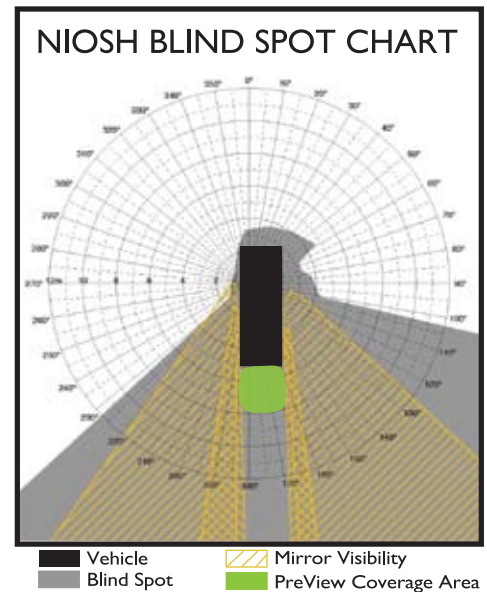

Available Options: Replace in-cab display with the PreView Plus camera and monitor. The driver will receive an audible alert when an item is in the blind zone and indicators are imposed on the monitor giving the driver approximate distancing information.



DIMENSIONS	SUGGESTED CONFIGURATION	SPECIFICATIONS
Sensor Unit: 9.25"(w) x 1.60"(d) x 4.36"(h)	SUGGESTED: WorkZone PreView (10')	Op. Temps: -40° – +185°F / -40° – +85°C
In-Cab Display: 2.3" (w) x 2" (d) x 1"(h)	OPTION: Replace display with camera interface, or integrate existing camera system with PreView VideoLink.	Current Draw: < 1/2 AMP
NOTE: Fleet version avail. with audible only		

To determine the best configuration to fit your specific vehicle and site conditions, please visit [www.aps-supply.com](http://www.aps-supply.com), or email [sales.apsa@aps-supply.com](mailto:sales.apsa@aps-supply.com) to speak to a Blind Spot specialist.